



XL8U

Super lightweight and compact.



Do you always know what presentation environment awaits you? Can you dim the lights? Can you set up the projector to perform to its optimum? In the future you no longer need to ask yourself such questions. With the XL8U you are always fully prepared for any circumstances. In just 2.7 kg hides a high-end projector, which can turn an away presentation into a home game. 2000 ANSI Lumens, an sRGB format and the integrated Video-Line Doubler provide your presentation with a full brilliance even in reduced lighting conditions. And the lamp life is up to 3000 hours. Furthermore any suboptimal installation problems are easily solved using the horizontal and vertical digital Keystone correction. You'll also make an impression on your audience as soon as you turn on the projector using the start-up company logo or any picture of your choice.


And to act on the side of caution a password protects the XL8U against any unauthorized access. An advanced programmable remote control is also available as an option. With just one remote control in your hand, you have a tight grip on your audience.

- 2000 ANSI Lumens
- XGA Resolution (1024 x 768 pixels)
- Weight of 2.7 kg
- Horizontal and vertical (automatic) Keystone correction
- PIN-Code protection



XL8U

Model	XL8U
Technology	3 x 0,7" Polysilicon-LCD (with Micro Lens Technology)
Resolution	1024 x 768 (total 2,359,296 pixels)
Colors	16.77 Million
Video	600 Lines
Vertical Frequency	(V-sync) 50–120 Hz
Horizontal Frequency	(H-sync) 15–100 kHz
Bandwidth	Up to 140 MHz/up to 100 MHz
Projection Lamp	180 W NSH
Lamp Life	Approx. 3000 hours (low mode)
Lens	F/1.8–2.1, f = 27–32 mm
Brightness	2000 ANSI Lumens
Contrast	350:1
Projection Distance	1.5–11.3 m
Picture Diagonal	1.02–7.62 m
Integrated Speaker	2 W Mono
PC-Compatibility	640 x 480 to 1024 x 768 pixels (compr. 1280 x 1024 pixels)
Video-Compatibility	NTSC/NTSC 4.43/PAL (incl. PAL-M, N) SECAM/PAL-60/DVD/HDTV (525 p, 720 p, 1080 i)/SCART (RGB + 1 V Sync)
Features	Natural Color Matrix (+ RGB-Tint), Line-Doubler, sRGB, horizontal und auto vertical Keystone Correction, Gamma Correction with 3 presets, Digital-Expand-Zoom, 3D Color Uniformity Correction, Picture-in-Picture, programmable Start Logo, PIN-Code Protection
Input Terminals	PC (RGB): Mini D-Sub 15-pin, Video: RCA + 1 x S-Video/Audio: 1 x Stereo RCA
Output Terminals	RGB: Mini D-Sub 15-pin
Communication Terminals	RS-232C (DIN 8-pin), USB-connector
Accessories	Cable, remote control (credit card format), soft bag, operation manual (CD-ROM)
Dimensions (W x H x D)	275 x 70 x 261 mm (excl. stand feet)
Weight	2.7 kg
Power Consumption	Approx. 230 W
Power Supply	100–240 V/AC ± 10 %, 50/60 Hz

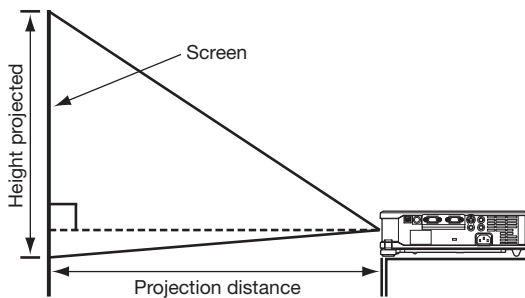

Diagonal size	Distance from screen	
	minimal cm	maximal cm
102	150	180
152	220	270
203	300	360
254	370	450
381	560	670
508	750	900
635	940	1130
762	1130	–

(The right to make technical changes is reserved; no liability is accepted for printing or other errors)

Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Straße 8 • D-40880 Ratingen

Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.mitsubishi-evs.de