



CP9800DW-S

QUALITY PHOTOS AT TOP SPEED.

Speed has nothing to do with trickery – it's all about having the right technology. The Mitsubishi CP9800DW-S dye-sublimation printer, which can be combined with Click and Kiosk systems for digital image delivery, is an excellent example. Its sophisticated technology can produce color prints at a resolution of 300 dpi at a constant rate of one every 8 seconds – including lamination. That means over 100 photos in just a quarter of an hour! And you can rest assured that no compromises have been made in terms of quality and image definition. Thanks to Mitsubishi's Adaptive Thermal-Head Management Engine it can faithfully reproduce even the minutest details.

A protective film has been added to extend the life of the thermal heads, and a special coating on the rear of the ink sheet roll reduces wear and tear on moving parts. In short, the CP9800DW-S not only operates at top speed, it also has excellent staying power.


HIGHLIGHTS

- Exceptionally high print speed (standard format 10 x 15 cm in 8.7 seconds)
- Resolution: 300 dpi
- Greater color depth on high grade paper
- Mitsubishi Adaptive Thermal-Head Management (MAM)
- 5 print formats (10 x 15 up to 15 x 23 cm)
- Can be integrated into Click and Kiosk systems
- Extremely durable due to low-wear operation

CP9800DW-S

MODEL	CP9800DW-S
Print Method	Dye sublimation
Resolution	Thermohead 300 dpi (11.8 dots/mm) max. resolution: 1868 x 2730 dots
Color Depth	24 bit, 256 color gradations for yellow, magenta, cyan 16.7 million colors
Print Speed/Picture	10 x 15 format: approx. 9 sec (standard), 8 sec (high grade) 13 x 18 format: approx. 17 sec (standard), 16 sec (high grade) 15 x 20 format: approx. 18 sec (standard), 17 sec (high grade) 15 x 21 format: approx. 18 sec (standard), 17 sec (high grade) 15 x 23 format: approx. 19 sec (standard), 18 sec (high grade)
Paper Size/Print Area	10 x 15 format: 102 x 152 mm 13 x 18 format: 127 x 178 mm 15 x 20 format: 152 x 203 mm* 15 x 21 format: 152 x 215 mm* 15 x 23 format: 152 x 229 mm
Printer Memory	2 x 32 MB
Interface	USB 2.0 (high speed)
Special Features	Mitsubishi Adaptive Thermal-Head Management Engine, Dual Line Technology
Power Supply	AC 220-240 V, 50/60 Hz / AC 120 V, 50/60 Hz
Power Consumption max.	at AC 220-240 V: approx. 2.5 A while printing, approx. 0.4 A stand-by at AC 120 V: approx. 4.7 A while printing, approx. 0.4 A stand-by
Dimensions (W x H x D)	approx. 329 x 383 x 404 mm (incl. bottom legs)
Weight	approx. 21 kg
Approvals	TÜV-GS, CE (LVD, EMC)
Accessories (incl. in delivery)	Power cable, quick user guide, CD-ROM with user manual, ink sheet cassette, paper flanges, spacers, strip bin, paper catcher
Consumables (optional)	
Standard	
CK9015	1 box containing 1 paper roll + ink sheet with lamination, 600 prints, 10 x 15 format
CK9318	1 box containing 1 paper roll + ink sheet with lamination, 350 prints, 13 x 18 format
CK9523	1 box containing 1 paper roll + ink sheet with lamination, 270 prints, 15 x 23 format
High Grade (for more color depth)	
CK9015HG	1 box containing 1 paper roll + ink sheet with lamination, 600 prints, 10 x 15 format
CK9318HG	1 box containing 1 paper roll + ink sheet with lamination, 350 prints, 13 x 18 format
CK9523HG	1 box containing 1 paper roll + ink sheet with lamination, 270 prints, 15 x 23 format

*CK9523/CK9523HG is used for these formats.

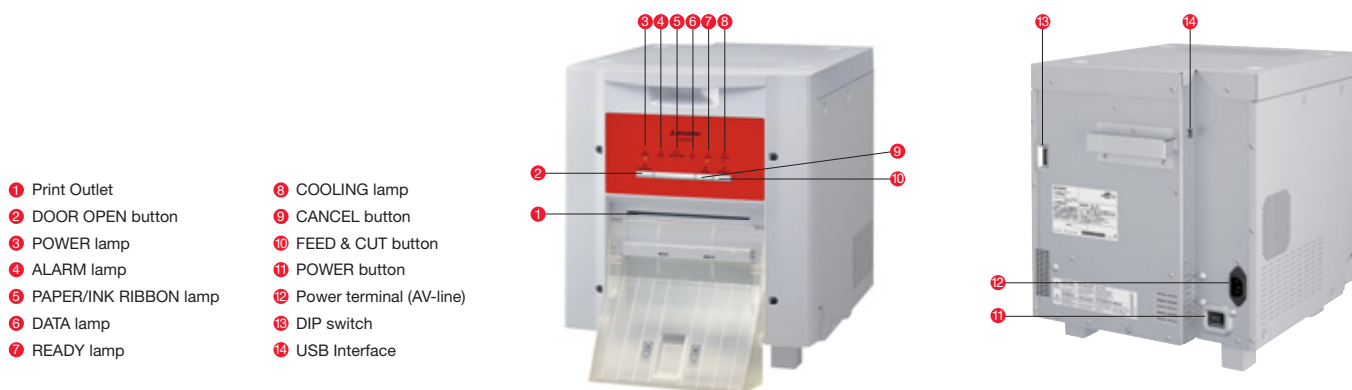

(The right to make technical changes is reserved; no liability is accepted for printing or other errors)

Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Straße 8 • D-40880 Ratingen
Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.mitsubishi-evs.de