



CP3020DE

Your Best Memories,
Ready to Take Home with You





Your holiday is just at an end, the family get-together was a few days ago – all that's left is the memories. And now your customers can take these home with them, in the form of large-format digital photos.

With the CP3020DE, this service is straightforward and fast. Developed especially for the photo industry, the dye sublimation printer produces photos in just 90 seconds, with an optimal resolution of 314 dpi.

Your customers have the choice: matt or glossy, 20 x 30 or 20 x 25 cm. A special lamination also ensures long-lasting colors, while the 24 MB picture memory and a paper supply of 50 sheets make the CP3020DE particularly user-friendly. In addition the CP3020DE has a USB interface and is completely compatible with Windows 98, ME, 2000 and XP, as well as Macintosh.

Convince your customers with a comprehensive service and the immediate advantages of the CP3020DE.

- Choice of 2 Photo Formats (20 x 25 cm and 20 x 30 cm)
- Matt or Glossy Finish
- Long-lasting Photos via Lamination
- Plug & Print USB Interface
- 314 dpi Resolution
- A4 Printout in only 77 Seconds
- 24 MB Picture Memory

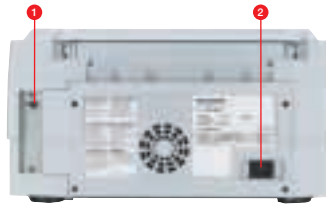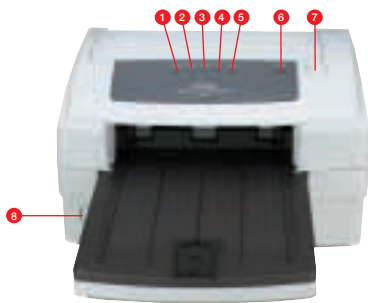

CP3020DE

- 1 Power Lamp 2 Alarm Lamp 3 Media Lamp 1 USB Interface 2 AC Line Socket
- 4 Data Lamp 5 Ready Lamp 6 Cancel Button
- 7 Open Button 8 Power Button

Model	CP3020DE
Print Method	Thermal sublimation
Resolution	Printhead 314 dpi (12.4 dots/mm) max. resolution: 2508 x 3762 dots
Color Depth	24 bit, 256 color gradations for yellow, magenta and cyan 16.7 million colors
Print Speed/Picture (not incl. data processing)	L-Format: approx. 77 seconds LL-Format: approx. 90 seconds
Paper Size	L-Format (20 x 25): 210 x 297 mm LL-Format (20 x 30): 216 x 356 mm
Print Area	L-Format: 203 x 254 mm, 2508 x 3134 dots LL-Format: 203 x 305 mm, 2508 x 3762 dots
Paper Capacity	50 sheets
Print Quality	Matt/glossy
Picture Memory	24 MB
Interface	USB 1.1
Printer Driver	Windows® 98, ME, 2000 and XP, Macintosh Adobe Photoshop Plug-In
Power Supply	AC 220-240 V, 50/60 Hz
Power Consumption	approx. 1.35 A (while printing), 0.2 A stand-by
Dimensions (W x H x D)	approx. 402 x 231 x 378 mm
Weight	approx. 14 kg
Approvals	TÜV-GS, CE (LVD, EMC)
Accessories (incl. in delivery)	Power cable, ink sheet cassette, paper cassette, Quick User Guide, CD-ROM with printer driver and user manual

Consumables

CK3020L4P	1 box containing 50 sheets of paper + ink sheet roll with lamination, 50 prints, L-format (20 x 25)
CK3020LL4P	1 box containing 50 sheets of paper + ink sheet roll with lamination, 50 prints, LL-format (20 x 30)
CK3020L4PM	1 box containing 50 sheets of paper + ink sheet roll with lamination, 50 prints, L-format (20 x 25) matt
CK3020LL4PM	1 box containing 50 sheets of paper + ink sheet roll with lamination, 50 prints, LL-format (20 x 30) matt

(The right to make technical changes is reserved; no liability is accepted for printing or other errors)

Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Straße 8 • D-40880 Ratingen
Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.mitsubishi-evs.de